

Physical

Logical

FILTERS:

SSID

MAC Address

Channel


Signal

RADIO	SSIDS
00:01:3B:A7:79:92	BTHub3-XF92
00:62:2C:4A:E0:42	BTHub5-MNZN
00:91:F9:01:60:80	BTHub5-SJS8
02:01:3B:A7:79:92	BTWifi-with-FON
10:C3:7B:A3:CC:D8	marconi
10:C3:7B:A3:CC:DC	marconi-5G
12:62:2C:4A:E0:42	BTWifi-with-FON
1C:A5:32:AE:BB:C6	EXT2-BTHub5-MNZN
1C:A5:32:AE:BB:C7	EXT5-BTHub5-MNZN
22:01:3B:A7:79:92	BTWifi-X
32:62:2C:4A:E0:42	BTWifi-X
4C:8B:EF:C8:B2:50	TALKTALK-C8B248
80:1F:02:76:54:A1	Rune_AP
AC:CF:85:F5:6E:D4	TALKTALKF56ECC
C0:3E:0F:69:98:7D	SKYE27C8
C2:91:F9:01:60:80	BTWifi-with-FON
E2:91:F9:01:60:80	BTWifi-X
E8:94:F6:85:FC:10	marconi


× 80:1F:02:76:54:A1

Radio Signal: -71 dBm PHY Types: b, g
Channel: 3 Recommended: 1
Max Data Rate: 54.00 Min Basic Rate: 1.00
Vendor: Edimax Technology Co. Ltd.
Overlapping APs: 8
Strongest: marconi
-63 dBm 10:C3:7B:A3:CC:D8

SSID	MAC Address
Rune_AP	80:1F:02:76:54:A1

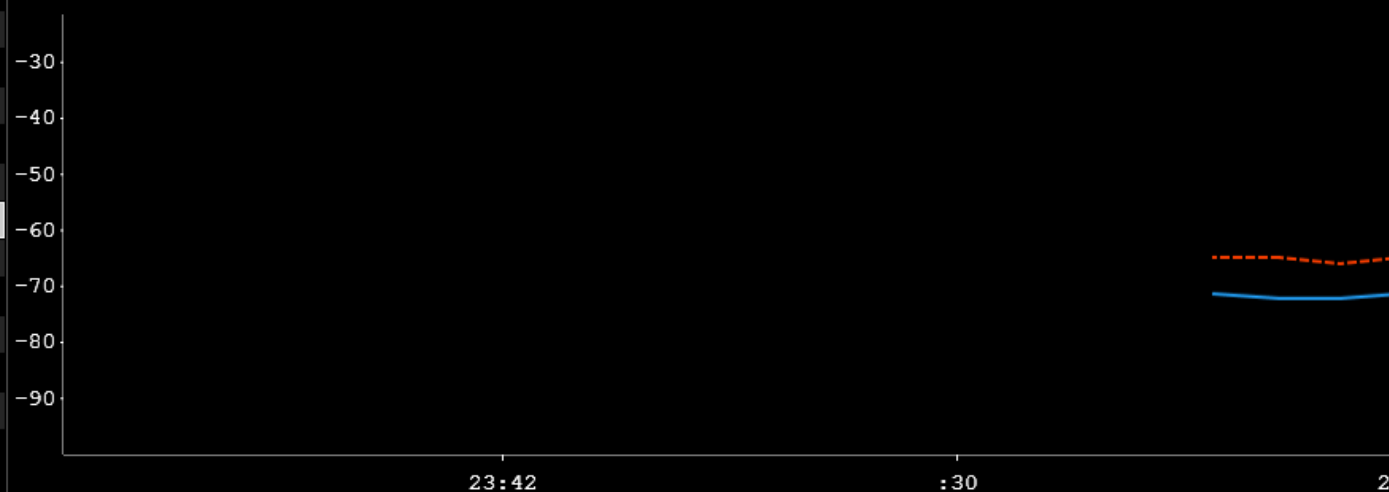

2.4 GHz

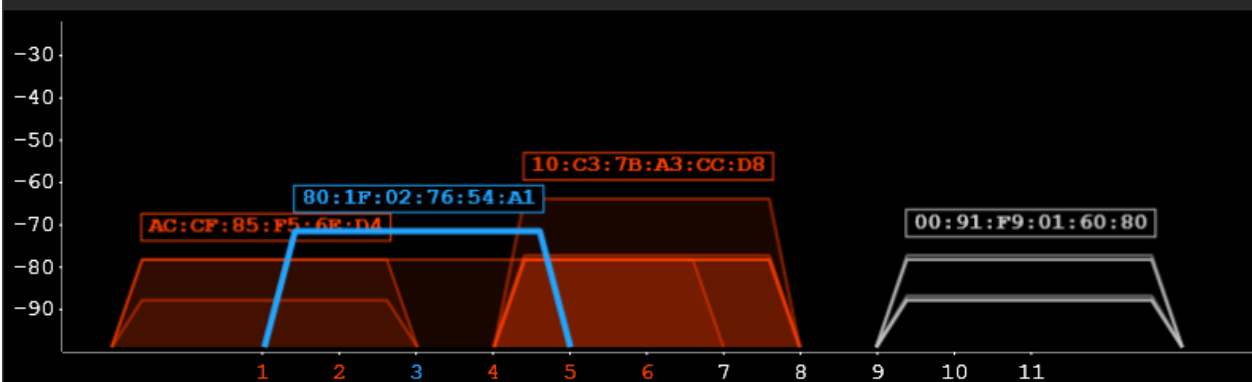

5 GHz

